# **Brake Calipers EV 024 EFM and EH 024 EFM**

## **RINGSPANN®**

# electromagnetically activated - spring released



Brake Caliper with electromagnet  Mounting to the machine parallel or at right angles to the brake disc  H  Frame size 024  Electromagnetically activated  E  Spring released  F  Manual adjustment to accommodate friction block wear  Supply voltage 220 to 240 VAC Supply voltage 380 to 480 VAC  Electromagnet mounted in	Features	Code	:
at right angles to the brake disc H  Frame size 024 024  Electromagnetically activated E  Spring released F  Manual adjustment to accommodate friction block wear  Supply voltage 220 to 240 VAC 240  Supply voltage 380 to 480 VAC 480  Electromagnet mounted in	Brake Caliper with electromagnet	Е	
Electromagnetically activated E  Spring released F  Manual adjustment to accommodate friction block wear  Supply voltage 220 to 240 VAC 240 Supply voltage 380 to 480 VAC 480  Electromagnet mounted in		•	
Spring released F  Manual adjustment to accommodate friction block wear  Supply voltage 220 to 240 VAC 240 Supply voltage 380 to 480 VAC 480  Electromagnet mounted in	Frame size 024	024	
Manual adjustment to accommodate friction block wear  Supply voltage 220 to 240 VAC 240 Supply voltage 380 to 480 VAC 480  Flectromagnet mounted in	Electromagnetically activated	Е	
accommodate friction block wear  Supply voltage 220 to 240 VAC Supply voltage 380 to 480 VAC  Flectromagnet mounted in	Spring released	F	
Supply voltage 380 to 480 VAC 480  Flectromagnet mounted in	•	М	
Electromagnet mounted in	,		
central position	_	М	
Thickness of brake disc 10 16 mm 12 or 18 26 mm 25			

## **Example for ordering**


Brake Caliper EV 024 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:

### **Advantages**

The brake caliper EV 024 EFM or EH 024 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misallignments of the brake disc. The attached electronic reduces the power consumption in closed position automatically.

#### **Options**

- Available with cCSAus approval
- Inductive proximity switch: "Brake released"-, "Brake closed"-status and/or "Friction block wear adjustment necessary"

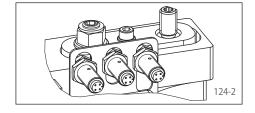

#### **Technical Data**

	Brake Calipers EV 024 EFM and EH 024 EFM with supply voltage	
	220 to 240 VAC	380 to 480 VAC
Brake disc diameter	Braking torque	Braking torque
mm	Nm	Nm
250	440	
300	550	
355	670	
430	830	
520	1030	
630	1 270	
Clamping force	5 500 N	
Clamping force or braking torque adjustable	60 - 100%	
Power consumption in closed position	20 W (100% du	20 W ty factor)
Fuse rating	10 A, Type "B"	
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature	
Actuation frequency*	at least 8 seconds between 2 activations	
Weight	13 kg	

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

EV 024 EFM - 480 M - 12


<sup>\*</sup> Shorter actuation frequency on request

# **Brake Calipers EV 024 EFM and EH 024 EFM**



# electromagnetically activated - spring released

## **Brake Caliper EV 024 EFM**

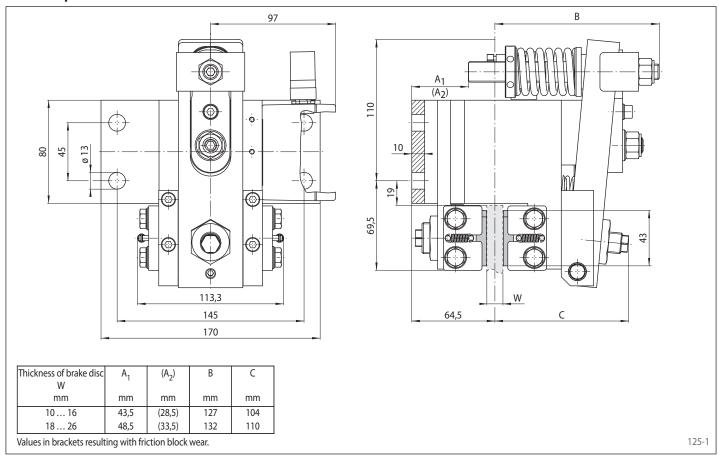

### **Brake Caliper EH 024 EFM**

