# **Brake Calipers EV 018 EFM and EH 018 EFM**

## **RINGSPANN®**

#### electromagnetically activated - spring released




#### **Advantages**


The brake caliper EV 018 EFM or EH 018 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misalignments of the brake disc. The separate electronic module (included) reduces the power consumption in closed position automatically.

#### **Options**

- Available with cCSAus approval
- Inductive proximity switch: "Brake released"-, "Brake closed"-status and/or "Friction block wear adjustment necessary"



#### **Electronic module**

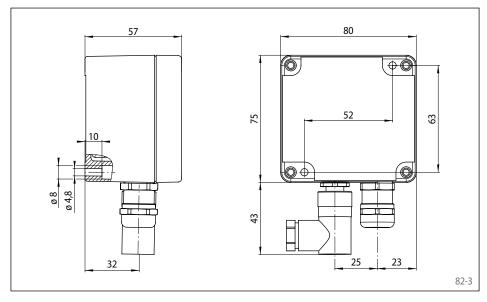

#### Code **Features** Brake Caliper with electromagnet Ε Mounting to the machine ٧ parallel or at right angles Н to the brake disc Frame size 018 018 Electromagnetically activated Ε F Spring released Manual adjustment to Μ accommodate friction block wear Supply voltage 220 to 240 VAC 240 Supply voltage 380 to 480 VAC 480 Electromagnet mounted in Μ central position Thickness of brake disc 8 ... 15 mm 12 or 16 ... 20 mm 20

#### **Example for ordering**

Brake Caliper EV 018 EFM, supply voltage 400 VAC, Electromagnet mounted in central position, thickness of brake disc 15 mm:

EV 018 EFM - 480 M - 12

#### **Technical Data**

	Brake Calipers EV 018 EFM and EH 018 EFM with supply voltage		
	220 to 240 VAC	380 to 480 VAC	
Brake disc diameter mm	Braking torque Nm	Braking torque Nm	
125	100		
150	130		
200	200		
250	260		
300	320		
355	400		
Clamping force	3 200 N		
Clamping force or braking torque adjustable	50 - 100%		
Power consumption in closed position	24 W	32 W	
	(100% duty factor)		
Power when closing the brake (< 1 s)	800 W	1 200 W	
Fuse rating	10 A, Type "B"		
Max. number of actuation	360/h permanent activations at 20 °C ambient temperature		
Actuation frequency*	at least 8 seconds between 2 activations		
Weight	6,5 kg		
<del>-</del>			

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.


<sup>\*</sup> Shorter actuation frequency on request

# **Brake Calipers EV 018 EFM and EH 018 EFM**



## electromagnetically activated - spring released

### **Brake Caliper EV 018 EFM**

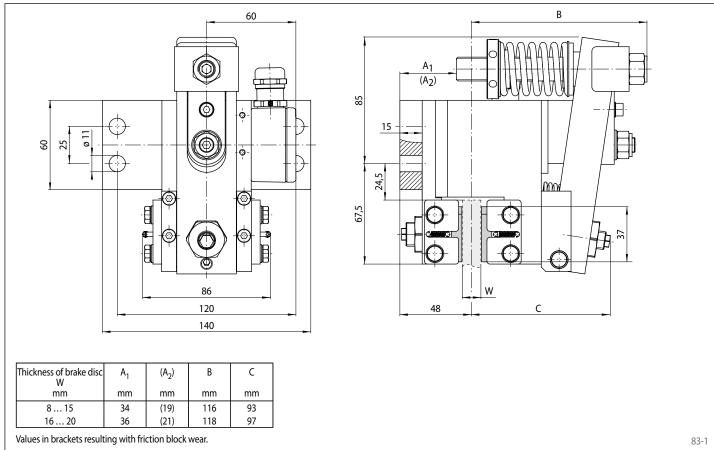

#### **Brake Caliper EH 018 EFM**

